



Cartridge:	CL-52 Photo	Cartridge Wt. New:	CL-52 Approx 55g
OEM:	Canon	Printer:	Pixma ip1600/ip2200 MP451
Printhead Location:	Bottom of cartridge	Cartridge Type:	Printhead + Sponge
Reliability:	*	Skill Level:	Average

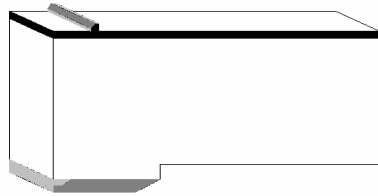

← Print Head

Cyan →

Black →

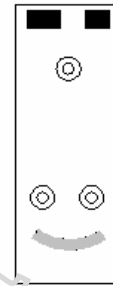

← Magenta

COMMENTS A easy to refill cartridge, be careful not to over fill the chambers as this will lead to cross contamination. Please be aware that by following these refilling instructions you are accepting sole risk for the refilling procedure and any potential resultant damage to the printer or failure by Canon to honour any warranty. Ausjet Inkjet Supplies hereby disclaim all responsibility.

REQUIREMENTS

- ◆ 3 x10ml syringes and sharp needles.
- ◆ 7ml of each appropriate ink
- ◆ HSC1000 solution or steam for improved results.
- ◆ Head sealing tape and or cartridge clip.

REFILLING METHOD

Step 1. Soak print head in HSC1000 for 10-20 mins or gently apply steam directly to print head to remove dried ink from the print head nozzles.

Step 2. Put the cartridge on some paper towels in an area where you can tolerate a spill.

Step 3. Peel off the top label being very careful not to damage the label as it has to be reused.

Step 4. Enlarge the 3 air vent holes which are under the label. Be very careful to only increase the size of the holes just enough to allow the needle to be inserted into the cartridge. An Ausjet drill tool is perfect for this task.

Step 5. Fill the syringe with 7ml of appropriate colour ink.

Step 6. Very S-L-O-W-L-Y inject ink into the correct chamber until the correct amount or ink is inserted or the sponge is full whichever is first. A little ink might come out of the top when full. If the cartridge is over-filled, draw some ink back with the syringe.

Step 6. When finished, replace the top label making sure that the label is placed back in the exact position.

The label must be placed in the same position for the cartridge air flow system to function correctly.

Step 7. Then do a DAB test.

Step 8. Replace the cartridge and run 1 - 3 cleaning cycles as per printer instructions.