


<b>Cartridge:</b>	SO20118, SO20122, SO20126, SO20130	<b>Cartridge Wt. New:</b>	Approx 157 g
<b>OEM:</b>	Epson	<b>Printer:</b>	Stylus Colour 3000
<b>Printhead Location:</b>	Printer	<b>Cartridge Type:</b>	Reservoir
<b>Reliability:</b>	* * * *	<b>Skill Level:</b>	Average

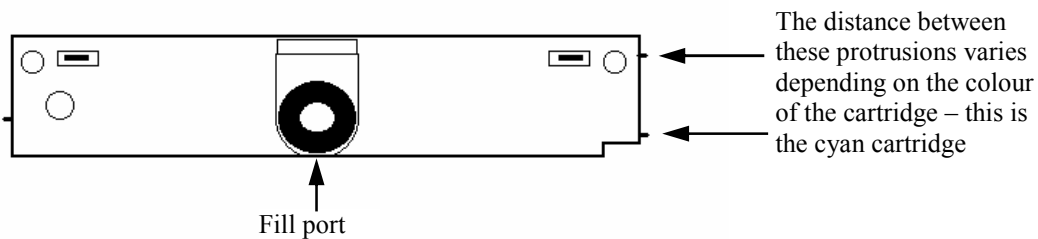

© Ausjet Ink Jet Supplies and Service Pty Ltd

Fig. 2.42

## COMMENTS

Care should be taken when refilling so as not to puncture plastic (lined) foil bag inside. Use a premium, filtered ink. Be very careful not to inject air or froth ink inside the cartridge. Read special Epson section on page 37 first.

## REQUIREMENTS

- ◆ SO20118 95 ml Appropriate Black Ink
- ◆ SO20130 95 ml Appropriate Cyan Ink
- ◆ SO20126 95 ml Appropriate Magenta Ink
- ◆ SO20122 95 ml Appropriate Yellow Ink
- ◆ 50 ml syringe with 18g needle shortened to 19 mm (1 per ink)
- ◆ 5 micron in line filter (1 per ink)
- ◆

## REFILLING METHOD

### STEP 1.

Attach needle and filter to empty syringe and insert into cartridge through fill port hole. (See Fig 2.42.) Take notice of the small pin hole where the printer originally punctured the rubber dam. Insert the needle as close as possible to this point as we do not want to start a new point of entry. Remove syringe leaving needle and filter sticking out of the cartridge. The cartridge should be standing upright.

### STEP 2.

Fill syringe with 50 ml of ink. Attach syringe to filter/needle assembly in cartridge and slowly inject the ink. Refill the syringe with a further 50 ml of ink and again inject into the cartridge. **DO NOT INJECT AIR INTO CARTRIDGE.** Now draw back on the syringe to remove any froth or air bubbles until clean ink shows in the syringe. Remove the syringe, filter and ink in one motion so as to leave cartridge free of air.