
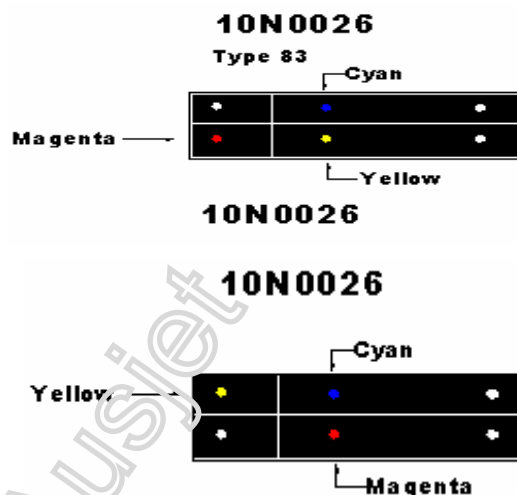


<b>Cartridge:</b>	10N0026 10N0227 18L0042 (83)	<b>Cartridge Wt. New:</b>	10N0026 30-32g 10N0227 30-32g 18L0042 43g
<b>OEM:</b>	LEXMARK	<b>Printer:</b>	Z13,Z23,Z25,Z33,Z35,Z513 Z601,Z602,Z603,Z605,X75 X1150,X1140,X1130,X1110
<b>Printhead Location:</b>	Cartridge	<b>Cartridge Type:</b>	Sponge
<b>Reliability:</b>	* * * *	<b>Skill Level:</b>	Average



© Ausjet Ink Jet Supplies and Service Pty Ltd

## COMMENTS

Check the refill holes with a toothpick to determine colour as there are 2 cartridges type 83 and other. Virtually all the colour Lexmark cartridges look the same and fill the same. Only the inks are different. These are sponge filled cartridges. Sponge is prone to drying out which may cause it to accept less ink than stated. Wash sponge out with alcohol/distilled water if this occurs. Easy cartridge to refill.

## REQUIREMENTS

- ◆ 10N0026,10N0227: 4 ml Appropriate Colour Ink
- ◆ 18L0042 5-6 ML of Appropriate Colour ink.
- ◆ 10 ml syringe with sharp needle
- ◆ small drill
- ◆ Head sealing tape and or cartridge clip.
- ◆ Steam for improved results

## REFILLING METHOD

### STEP 1.

Remove the top of the cartridge with a craft knife.

### STEP 2.

Fill syringe with 4 ml ink and insert through the appropriate hole (see above diagram) into the sponge as far as it will go. Inject ink s-l-o-w-l-y into the cartridge making sure the needle is sitting on the bottom of the cartridge.

Cartridge may not accept more than 2-3 ml of ink. Sit cartridge on paper towel after filling to absorb any drips.

### STEP 3.

Use the Ausjet priming tool to remove air locks and prime the cartridge. Then do a DAB test. Then run 2 to 3 cleaning cycles and do a test print.

### STEP 4.

If not printing correctly gently steam or soak the printhead in hot water for 10-20 mins. Then repeat step3