


<b>Cartridge:</b>	<b>SO20036</b>	<b>Cartridge Wt. New:</b>	Approx. 125 g
<b>OEM:</b>	<b>Epson</b>	<b>Printer:</b>	Stylus Colour Pro, Stylus Colour Pro XL
<b>Printhead Location:</b>	Printer	<b>Cartridge Type:</b>	Sponge
<b>Reliability:</b>	* * * *	<b>Skill Level:</b>	Average

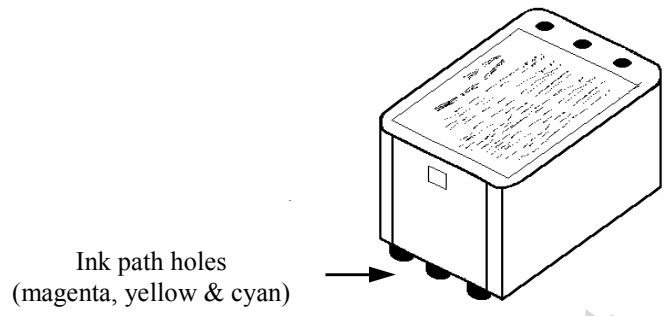

© Ausjet Ink Jet Supplies and Service Pty Ltd

Fig. 2.34

**COMMENTS**

If you prefer you can use the vacuum method described on the previous page using the S020034 as an example or you can use this method. Read special Epson section on page 37 first.

**REQUIREMENTS**

- ◆ 0-18 ml each of Appropriate Cyan, Magenta, Yellow Inks. (Refer to Ausjet Ink Selector)
- ◆ 20 ml syringe with sharp needle (One for each colour)

**REFILLING METHOD**

**STEP 1.**

Find the three round indentation on the top of the cartridge at the end opposite the vent hole (See Fig. 2.34). With a sharp needle pierce the foil through the soft centre of the indentation.

**STEP 2.**

Draw up to 15 ml of the appropriate ink into the 20 ml syringe. Inject the ink very, very slowly through the hole you pierced in Step 1.

**STEP 3.**

Allow cartridge to drip on paper towel for at least one hour prior to sealing the ink path holes for shipping. Seal the hole you pierced in the indentation with tape so that it is air tight.