

---

# Ausjet PG-670 / CLI-671 Resetter User's Guide



**Important : This resetter is limited to 100 successful resets only. After this time the resetter has reached its end of life and a new resetter will need to be purchased.**

---

---

## 1. USB Connection

**Connect the USB cable to the resetter. The resetter will flash green and this is indicating it is ready.**



## 2. Install Cartridge

**There is two adaptors one for the PGI-670 size and one for the CLI-671 cartridge. Install the appropriate adaptor for the cartridge you wish to reset. Once the cartridge is installed the light on the resetter will turn orange indicating resetting is in progress.**



---

### 3. Result of Resetting

#### **Successful reset :**

**Light on resetter is stable green and LED light on cartridge is red.**


#### **Reset failed :**

**Reset failed: Light on resetter will be red until cartridge is removed.**



### 4. End of Life of the resetter

**When the resetter reaches 100 successful resets it has reached the end of its life. At this time the resetter will continuously show a red light.**

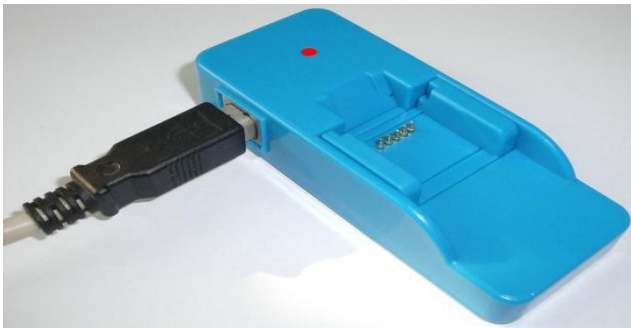

**Notice: Maximum number of successful resets is limited to 100.**

---