
Cartridge:	BJI-201 K, C, M, Y BJI-201 KHC	Cartridge Wt. New:	<b>BJI-201 K,C,M,Y</b> Approx 16 g <b>BJI-201 KHC</b> Approx 24 g
OEM:	Canon	Printer:	BJC-600, BJC-610, BJC-620
Printhead Location:	Disposable	Cartridge Type:	Reservoir + Sponge
Reliability:	*	Skill Level:	Average

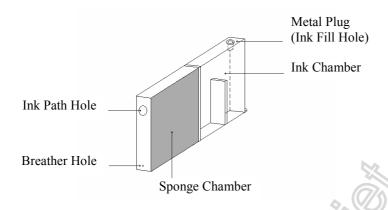

© Ausjet Ink Jet Supplies and Service Pty Ltd

Fig. 2.28

### **COMMENTS**

Always refill the cartridge when it is low on ink and never let the cartridge dry out completely because residue may clog the printing mechanism. The print head on this printer is a consumable item with a life of 10,000 pages of text or less than 40 refills per colour. Refillers may find it easier to provide a reputable brand of compatible cartridge rather than risk possible problems that may occur with this cartridge. Caution: refill at own risk.

# REQUIREMENTS

- ♦ BJI-201Bk: 5-8 ml Appropriate Black Ink. (Refer to Ausjet Ink Selector)
- ♦ BJI-201C: 5-8 ml Appropriate Cyan :::\
- ♦ BJI-201M: 5-8 ml Appropriate Magenta lok
- ♦ BJI-201Y: 5-8 ml Appropriate Yellow Ink
- ♦ 10 ml syringe with 18g drawing up needle
- ♦ Plug (optional)

## REFILLING METHOD

#### STEP 1.

- A. Push in the silver ball on the underside of cartridge as shown in diagram and fill through this hole.
- B. Alternatively turn the cartridge over to where the ink path hole is facing you. If you are careful you can gently slide the blunt needle around the sponge and take it across the top of the sponge and into the reservoir from the inside of the cartridge.

#### STEP 2.

Whichever method you use; slowly inject up to 7.5 ml of ink into the cartridge. DO NOT OVERFILL. Drip 1.0 ml on sponge at ink path hole to prevent air locks.

### STEP 3.

If you used part A in step 1, reseal the hole that you made in the cartridge with a plug. Seal all openings in the cartridge with tape to prevent leakage.