


<b>Cartridge:</b>	B0203K	<b>Cartridge Wt. New:</b>	Approx 49 g
<b>OEM:</b>	OLIVETTI	<b>Printer:</b>	JP 450, JP 192
<b>Printhead Location:</b>	Cartridge	<b>Cartridge Type:</b>	Sponge
<b>Reliability:</b>	**	<b>Skill Level:</b>	Average

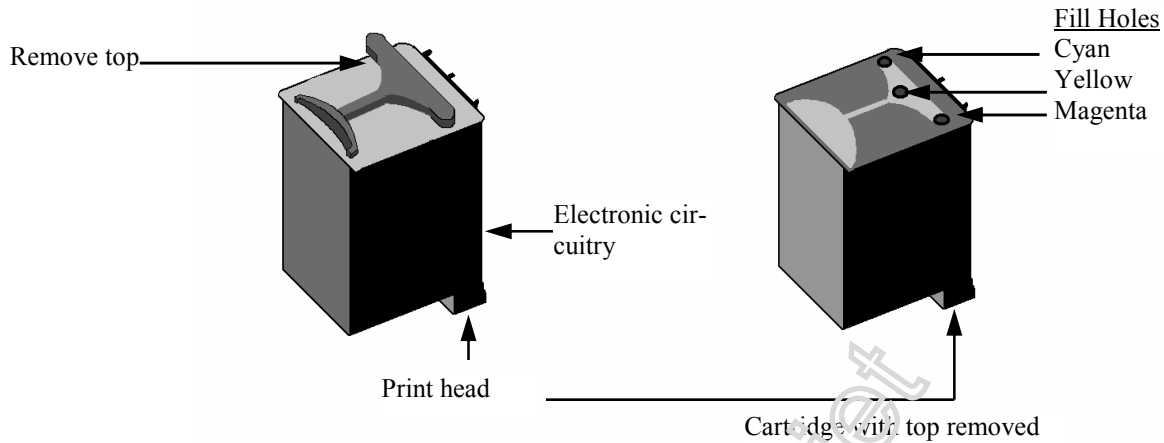

© Ausjet Ink Jet Supplies and Service Pty Ltd

Fig. 2.77

Fig. 2.78

## COMMENTS

This is a tri-colour sponge filled cartridge. Print head contaminates easily. Difficult to decontaminate.

## REQUIREMENTS

- ◆ 0-6 ml each Appropriate Cyan, Magenta, Yellow Inks
- ◆ 3 x 5 ml syringe
- ◆ HSC1000 High speed cleaning solution.

## REFILLING METHOD

### STEP 1.

Soak print head in HSC1000 for 10-20 mins to remove dried ink from the print head nozzles.

### STEP 2.

Remove yellow cap. This should come off quite easily exposing three plastic stacks leading to the ink chambers.

### STEP 3.

Slowly inject the ink into the first chamber. If ink wells out of the cavity draw back on the syringe to remove 1-2 ml of ink. Repeat with the second and third chambers.

### STEP 3.

Replace the yellow cover. It should click firmly into place.